

Center Pivot Guider (Small)




Technical Data

Model	Center Pivot Guider
Type	Electrical
Roller Size (option)	200 ~ 500 mm
Roller Material (option)	Aluminum, Rubber, Cork, Silica
Line Speed	Max. 250m/min
Sensor & Control (option)	EPC, CPC
Temperature	5~50℃

TOUGU DENKI Center Pivot Guider is a pivoting frame system for web guiding. It consists of a removable upper frame, a fixed lower frame, motor, gears and ball screw.

Center Pivot Guider must work with TOUGU DENKI Web Guiding System. For the requirements, there are different Web Guiding Systems can be chosen: EPC and CPC.

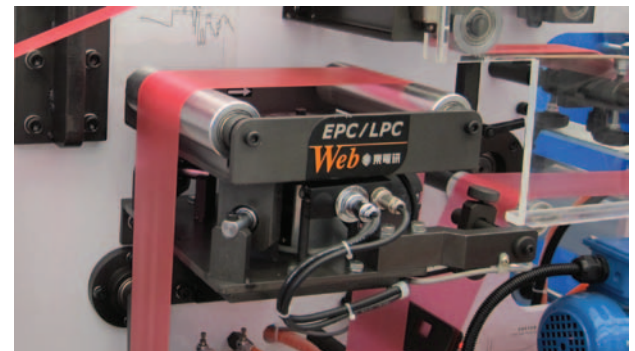

Center Pivot Guider C-200 is used on a Bag Making Machine

Process

